


# Motor Bracket MBA (Narrow Type)

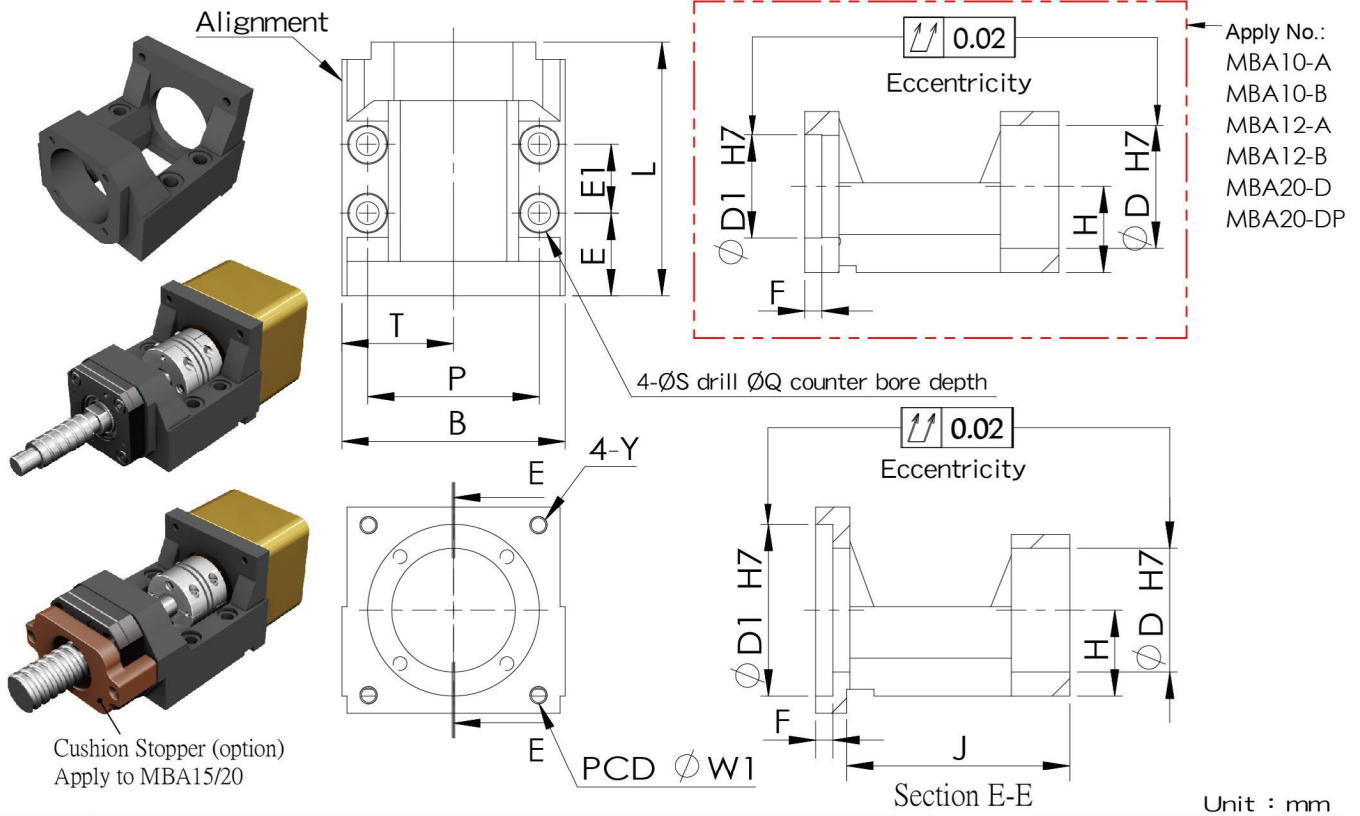

Model No.	Dimensions of Motor Bracket															Support unit		Suggest Coupling	
	D1	W1	Y	D	L	H ±0.02	B	P	T	S	Q	E	E1	F	J	Weight (Kgs)	Fixed-side		Supported-side
MBA6/8-A	30	45	M3	28	61	17	52	41	26	5.5	9.5	19	20	5	54	0.29	FKA06 FKA08	EF08	SGS 27C
MBA6/8-B		46	M4																
MBA10-A	30	45	M3	34	74	22	65	50	32.5	6.6	11	24	20	5	flat	0.62	FK10	BF10	SGL 27C
MBA10-B		46	M4																
MBA10-C	38.1	66.7	M5	34	74	22	65	50	32.5	6.6	11	24	20	5	65	0.66	FK10	BF10	SGL 34C
MBA10-D	50	70																	
MBA10-DP			M4													0.63			SGS 34C
MBA12-A	30	45	M3	36	74	25	65	50	32.5	6.6	11	24	20	5	flat	0.67	FK12	BF12	SGL 27C
MBA12-B		46	M4																
MBA12-BF	36	70.7	M4	36	74	25	65	50	32.5	6.6	11	24	20	Thru hole	65	0.67	FK12	BF12	SGL 34C
MBA12-C	38.1	66.7																	
MBA12-D	50	70	M5	36	74	25	65	50	32.5	6.6	11	24	20	5	65	0.67	FK12	BF12	SGL 34C
MBA12-DP			M4																
MBA15-C	38.1	66.7	M4	40	84	28	70	55	35	6.6	11	25	28	5	75	0.81	FK15	BF15	SGL 34C
MBA15-D	50	70	M5																
MBA15-DP			M4													0.79			SGS 34C SGL 34C
MBA15-F	73	98.4	M6	40	94	28	88	70	44	8.5	14	30	28	6	83	1.3	FK15	BF15	SGS 40C SGS 45C SGL 40C SGL 45C
MBA15-E	70	90																	
MBA15-EP			M5												81	1.32			
MBA20-D	50	70	M5	57	113	34	88	70	44	8.5	14	29	42	5	flat	1.54	FKA20	BF20	SGL 45C
MBA20-DP			M4																
MBA20-F	73	98.4	M6	57	113	34	88	70	44	8.5	14	29	42	6	102	1.57	FKA20	BF20	SGS 45C
MBA20-E	70	90																	
MBA20-EP			M5													1.59			SGL 45C
MBA20-X	80	100	M6													1.6			SGS 45C SGS 50C

Note : 1.Can choose B angle bearings when use support unit with FKA20