


# MBL(低窄軌型)傳動座

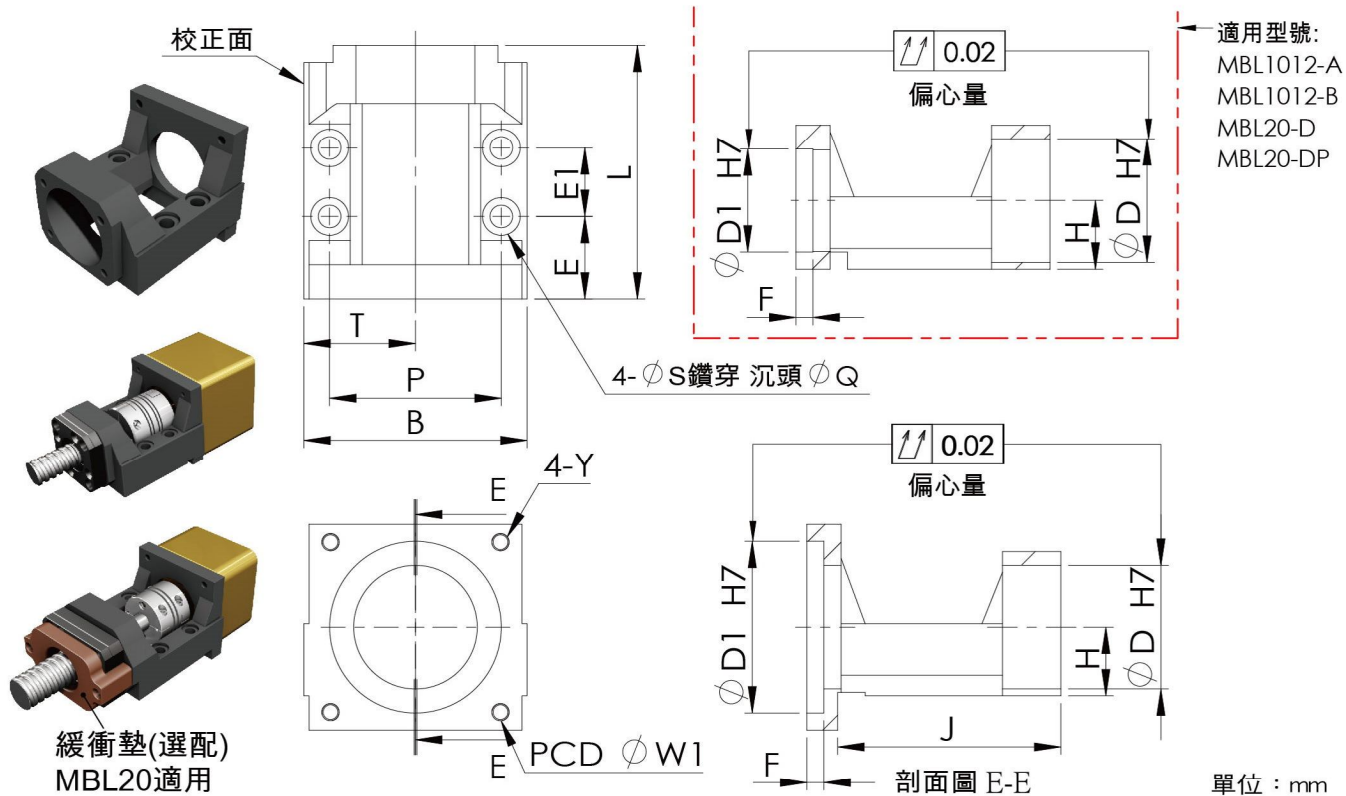

型號	傳動座尺寸															支撐座		建議 聯軸器			
	D1	W1	Y	D	L	H ±0.02	B	P	T	S	Q	E	E1	F	J	重量 (Kgs)	固定端		支持端		
MBL6/8-A	30	45	M3	28	61	15.5	52	41	26	5.5	9.5	19	20	5	54	0.27	FKA06	LF08	SGS 27C		
MBL6/8-B		46	M4														LFA12				
MBL10/12-A	30	45	M3	36	74	20	65	50	32.5	6.6	11	24	20	5	平底	0.57	FKA10	LF12	SGS 34C		
MBL10/12-B		46	M4																	LFA15	
MBL10/12-C	38.1	66.7	M5	40	82	22	70	55	35	6.6	11	24	20	5	65	0.62	FKA10	LF12	SGS 34C		
MBL10/12-D	50	70																		M4	LFA15
MBL10/12-DP	50	70	M4	40	82	22	70	55	35	6.6	11	24	20	5	65	0.58	FKA15	LF15	SGS 34C		
MBL15-C	38.1	66.7	M4	82	22	70	55	35	6.6	11	24	20	5	65	0.59	LFA20					
MBL15-D	50	70	M5	84	22	70	55	35	6.6	11	24	20	5	65	0.69	FKA15	LF15	LFA20	SGS 34C		
MBL15-DP			M4	84	22	70	55	35	6.6	11	24	20	5	65	0.68						
MBL15-F	73	98.4	M6	40	82	22	88	70	44	8.5	14	29	28	6	81	1.15	FKA15	LF15	LFA20	SGS 40C	
MBL15-E	70	90																			94
MBL15-EP	70	90	M5	40	82	22	88	70	44	8.5	14	29	28	6	81	1.17	FKA15	LF15	LFA20	SGS 40C	
MBL20-D	50	70	M5	57	113	30	88	70	44	8.5	14	29	42	5	平底	1.42	FKA20	AF20	EF20	LFA25	SGS 45C
MBL20-DP			M4																		
MBL20-F	73	98.4	M6	57	113	30	88	70	44	8.5	14	29	42	6	102	1.44	FKA20	AF20	EF20	LFA25	SGS 45C
MBL20-E	70	90																			
MBL20-EP	70	90	M5	57	113	30	88	70	44	8.5	14	29	42	6	102	1.49	FKA20	AF20	EF20	LFA25	SGS 45C
MBL20-X	80	100	M6	57	113	30	88	70	44	8.5	14	29	42	6	102	1.41	FKA20	AF20	EF20	LFA25	SGS 45C SGS 50C

備註：1 使用支撐座FKA20型號時，可選用負荷較大之B角度軸承